

NEVER-SEEZ®

Anti-Seize & Lubricating Compound

PRODUCT DATA

High Temperature Bearing Lubricant

Product Description

Never-Seez High Temperature Bearing Lubricant is an exclusive combination of a specially formulated high temperature grease and lubricating enhancers that provide long lasting lubrication at temperatures between 500°F and 1000°F. High Temperature Bearing Lubricant is recommended for ball and roller bearings, bushings, open and sealed bearings.

Product Benefits

- Excellent lubrication between 500°F and 1000°F.
- Has no "dropping point"-will not melt.
- Good extreme pressure characteristics.
- Contains no metallic particles.

Product Applications


- Process oven bearings
- Heat treat ovens and furnaces
- Kiln ovens and casters
- Oven damper controls
- High temperature exhaust fans

Limitations

- ✓ Never-Seez High Temperature Bearing Lubricant does oxidize at temperatures above 500°F, therefore frequent applications are necessary to provide maximum lubrication.
- Not compatible with traditional greases. Purge or clean old grease thoroughly from system.
- Speed factor (n.dm) less than 150,000.

Other Anti-Seize Lubricants from Bostik

- Regular Grade
- Regular Grade, Nuclear Certified
- Regular Grade LV
- Pure Nickel Special
- Nuclear Grade, Nickel Special
- Nuclear Grade Non-Aluminum, Nickel Special
- High Temp Stainless
- High Temp Stainless, Nuclear Certified
- Blue Moly
- Black Moly
- Red Bearing Lubricant
- White Food Grade with PTFE
- Pipe Compound with Teflon®
- Marine Grade

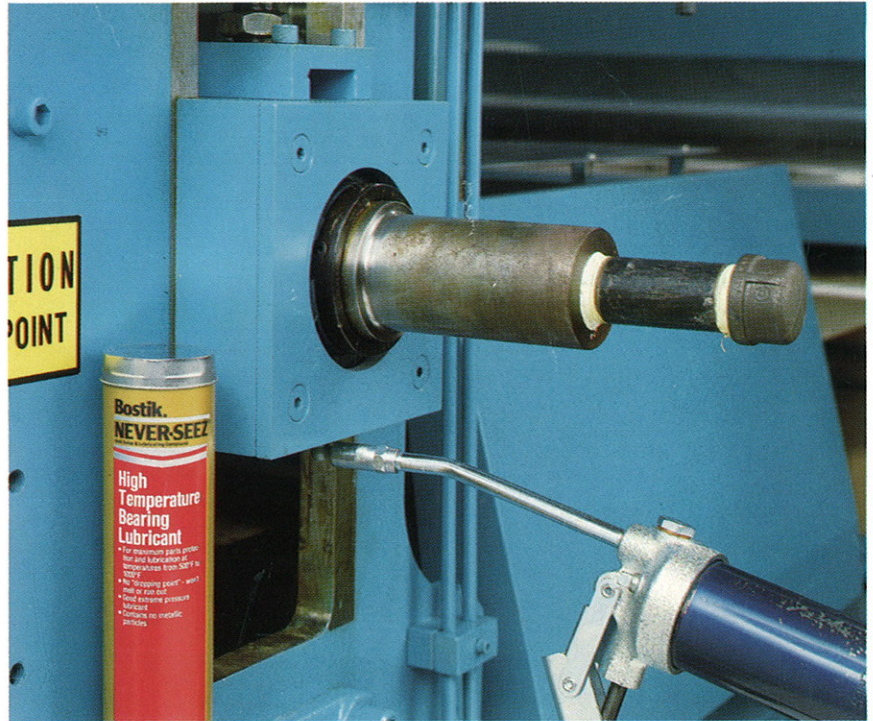

Technical Specifications

Color	Black	
Temperature Range	15°F to 1000°F	
Particle Size	1 mil. maximum	
Specific Gravity	0.92	
		ASTM Test Method
NLGI Grade	1/2	D-217
Flash Point	575°F	D-92
Dropping Point	None	D-566
Worked Penetration (60 Strokes)	290	D-217
Copper corrosion test (212°F, 24 hours)	No corrosion	D-130-83
Coefficient of Friction ("K" Factor)	0.140	
Coefficient of Friction (4 ball) 167°F	.0703	D-2266
Water Resistance	Excellent in fresh or salt water	

Ingredients: Special high temperature bentone grease and graphite flake.

Shelf Life: NEVER-SEEZ High Temperature Bearing Lubricant does not deteriorate with age when stored unopened at temperatures below 120°F. Quality and performance are guaranteed for two years after purchase on unopened containers.

Use in accordance with **Material Safety Data Sheet.**

Ordering Information

HIGH TEMPERATURE BEARING LUBRICANT

STOCK NUMBER	PRODUCT DESCRIPTION	SIZE
NHT-7 BT	Brush Top Can	7 oz.
NHTC-14	Cartridge	14 oz.
NHT-35B	Pail	35 lb.

IMPORTANT NOTICE:

All statements, technical information and recommendations set forth herein are based on tests which Bostik believes to be reliable. However, Bostik does not guarantee their accuracy or completeness. The buyer should conduct its own tests of this product before use to determine proper preparation technique and suitability for proposed application. Any sales of this product shall be on terms and conditions set forth on Bostik's order acknowledgment. Bostik warrants that the product conforms with Bostik written specifications, and is free from defects. BOSTIK DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE BUYER'S SOLE REMEDY FOR NONCOMPLIANCE WITH THIS WARRANTY SHALL BE FOR THE REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. IN NO CASE WILL BOSTIK BE LIABLE FOR DIRECT, CONSEQUENTIAL ECONOMIC OR OTHER DAMAGES.

Bostik

BOSTON STREET
MIDDLETON, MA 01949
TEL. 508-777-0100
FAX 508-750-7212

7/94 - N12C - 7M