

## TRI-FLOW® FOOD GRADE SYNTHETIC GREASE TF22020

- NSF Registration Number 127510, H1 rated
- Waterproof
- Long Lasting
- Formulated with P.T.F.E.
- Chemical Resistant



CLEANERS, DEGREASERS  
LUBES AND SEALANTS


SUPERIOR  
LUBRICANTS

PAINTS, COATINGS  
AND PRIMERS

CAULKS, SEALANTS  
AND ADHESIVES

BRUSHES, ROLLER COVERS  
AND ACCESSORIES

Tri-Flow® Food Grade Synthetic Grease is a multi-purpose, non-melting, waterproof grease fortified with P.T.F.E. It is designed specifically to seal out water and lubricate under the most demanding conditions. With its excellent film strength and extreme pressure qualities it forms a tough durable film of lubrication that prevents metal-to-metal contact. It is a pure synthetic-based lubricant and is NSF registered, H1 rated, which gives it full acceptability for use in all areas where incidental food contact may occur.

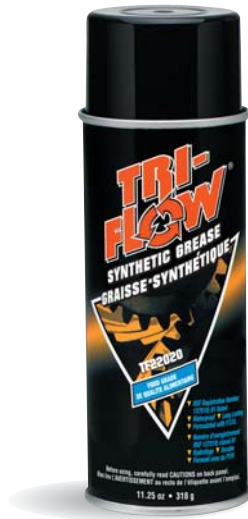

## PHYSICAL PROPERTIES

**APPEARANCE:** Translucent white  
**BASE:** Synthetic w/P.T.F.E.  
**ODOR:** Mild  
**PROPELLANT:** Hydrocarbon  
**LABEL WEIGHT:** 11.25 oz  
**SPECIFICATIONS:** NSF Registration 127510, H1 rated  
**WT/GAL:** 5.83 lbs.  
**SPECIFIC GRAVITY:** .70  
**% NON VOLATILE:** 30%  
**% VOC:** 70%  
**SHELF LIFE:** 3 years  
**TIMKEN OK LOAD TEST:** 35 lbs. per ASTM D-2509  
**4-BALL WEAR SCAR:** .050 (40 Kg. 1 hr. @ 1200 rpm) per ASTM-2266  
**WATER WASHOUT LOSS:** 1.9% per ASTM D-1264  
**EVAPORATION LOSS:** 1.5% (10 hrs. @ 210°F) per ASTM-D972  
**FLASH POINT:** <0°F  
**DIELECTRIC STRENGTH:** 30,000  
**OPERATING TEMPERATURE RANGE:** -10° - 400°F  
**HMIS (NFPA RATING):** 2, 4, 0

## USES

- Gaskets & "O" rings
- Pump bearings
- Can seamers
- Conveyors
- Pool equipment
- Electric motors
- Valves
- Bushings
- Universal joints
- Sterilizer chains
- Slides
- Water filters

## APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale.

### Aerosol Application:

- Product should be sprayed in a well ventilated area.
- Sprays best at room temperature
- Shake well before using
- Spray at a distance of 10" to 14" from surface.

## PACKAGING

**Part #:** TF22020  
**UPC Code:** 0-32053-22020-3  
**Fill Wt.:** 11.25 oz.  
**Per Case:** 12  
**Carton Dimensions:** L 11.13" x W 8.44" x H 8.38"

## RESOURCES

**MSDS/EDS/PRODUCT DATA SHEETS:** [www.paintdocs.com](http://www.paintdocs.com)

**CUSTOMER SERVICE:** 1-800-777-2966

**TECHNICAL INFORMATION:** 1-800-251-2486

Distributed By:

**EVERYTHING ELSE  
IS JUST A LUBE!**



**INDUSTRIAL**

**Krylon Products Group**  
 101 Prospect Ave. NW  
 Cleveland, OH 44115  
[www.KPG-Industrial.com](http://www.KPG-Industrial.com)  
 Tel: 1-800-777-2966